

AQUA

Communications, Inc.

Aqua Telescoping Pole Option Instructions.

Assembly

The telescoping Pole comes in four different sizes 2'-4', 4'-7'6", 6'-12' and 8'-16'. All poles operate on the same principles.

Fig. 1.




1. Install the Camera on the "Spring End" of the pole. As with all SnakeEye cables and accessories insert the camera into the connector and fully tighten the connector nut.

CATUION: Never over tighten the connector. Never use any tool to tighten the connector nuts. The connectors are designed to be hand tightened only. Stop turning when you feel the connector bottom out.

2. Insert the Display Unit into the movable cradle. Push the unit all the way into the cradle and then secure it with the hand strap as shown in the fig 2.


Fig. 2

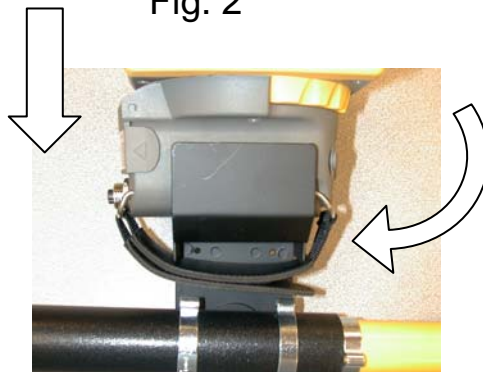



3. Unwind the cable and connect it to the display unit. The unit is now operational.

Operation


1. The camera may be articulated approximately 135° from its straight-ahead position. Pulling the cable from the bottom of the handle and securing it in the Cable Lock allows you to set the camera at any desired angle and lock it in position.

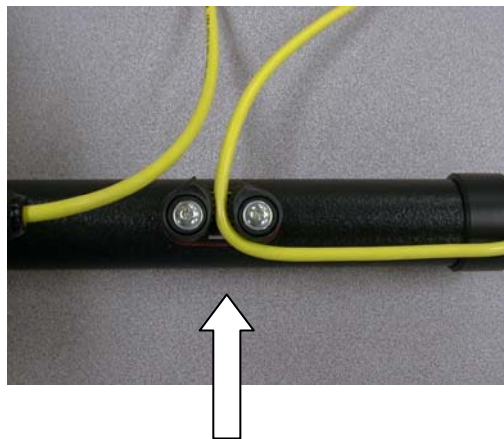

2. The Display Unit can be tilted for a better viewing angle when the pole is tilted up or down.

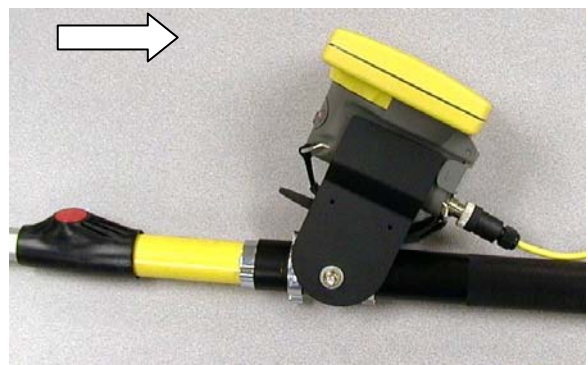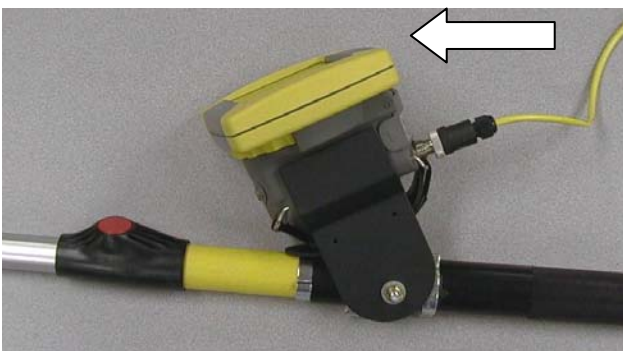

3. The Pole can be pivoted within the handle to pan the camera around.

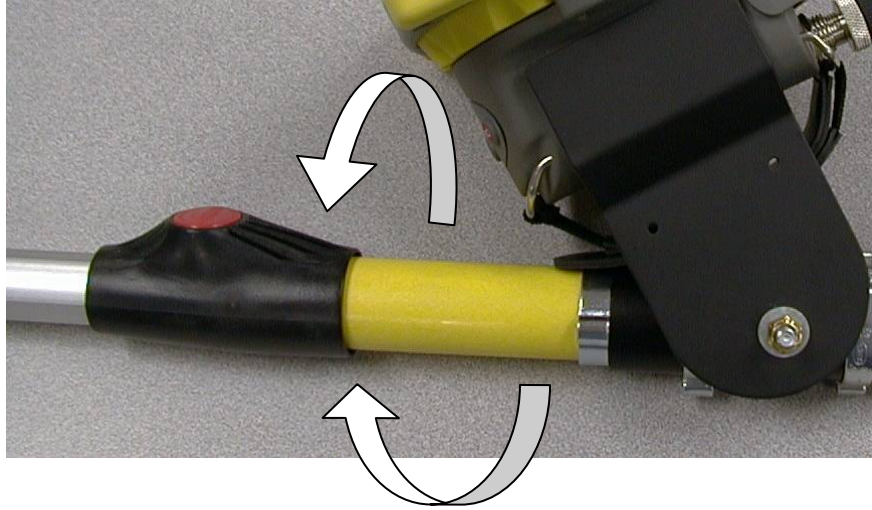

4. Hold the pole beyond the display for best balance and comfort.

